





1. Geberit HDPE

1.1	Pipes.....	6
1.2	Fittings	6
1.2.1	Bends	6
1.2.2	Branch fittings.....	10
1.2.3	Reducers.....	19
1.2.4	Access pipes.....	21
1.2.5	Adapters	23
1.2.6	Special fittings	23
1.3	Connections	25
1.3.1	Welding joints	25
1.3.2	Push-in connections	26
1.3.3	Adapters on other product materials	27
1.3.4	Screwing joints	30
1.3.5	Flange connections	32
1.3.6	Flange bushings.....	33
1.4	Waste fittings.....	34
1.4.1	Connection bends.....	34
1.4.2	Coupling sockets.....	36
1.4.3	Straight connectors	37
1.4.4	P-traps	38
1.4.5	Suction traps.....	38
1.5	Accessories.....	39
1.5.1	Air admittance valves	39
1.5.2	Pipe brackets	40
1.5.3	Fastenings for pipe brackets	42
1.5.4	Support shells.....	45
1.5.5	Sealings.....	45
1.5.6	Seals	46
1.5.7	Protection covers	47
1.5.8	Consumables	47

1.1 Pipes

Geberit HDPE pipe



Application purposes

- For building drainage



Characteristics

- UV-resistant

Technical data

Material		PE-HD						
Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	Acm ² [cm ²]	PN [bar]	S
379.000.16.0	30	32	26	3	5	5.3	10.3	5
360.000.16.0	40	40	34	3	5	9	8.1	6.3
361.000.16.0	50	50	44	3	5	15.2	6.4	8
363.000.16.0	56	56	50	3	5	19.6	5.7	8.8
364.000.16.0	60	63	57	3	5	25.4	5	10
365.000.16.0	70	75	69	3	5	37.3	4.1	12.5
366.000.16.0	90	90	83	3.5	5	54.1	4	12.5
367.000.16.0	100	110	101.4	4.3	5	80.7	4	12.5
368.000.16.0	125	125	115.2	4.9	5	104.5	4	12.5
369.000.16.0	150	160	147.6	6.2	5	171.1	4	12.5
370.000.16.0	200	200	187.6	6.2	5	276.4	3.2	16
371.000.16.0	250	250	234.4	7.8	5	431.5	3.2	16
372.000.16.0	300	315	295.4	9.8	5	685.3	3.2	16

Geberit HDPE pipe PN4



Application purposes

- For discharge pipes with increased negative pressure
- For building drainage

Characteristics

- UV-resistant


Technical data

Material		PE-HD						
Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	Acm ² [cm ²]	PN [bar]	S
370.050.16.0	200	200	184.6	7.7	5	268.4	4	12.5
371.050.16.0	250	250	230.6	9.7	5	418.2	4	12.5
372.050.16.0	300	315	290.6	12.2	5	663.8	4	12.5

1.2 Fittings

1.2.1 Bends

Geberit HDPE bend 30°



Application purposes

- For building drainage


Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD				
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	r [cm]	
370.030.16.1	200	200	15	2	20	

Geberit HDPE segment bend 30°



Application purposes


- For building drainage

Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD				
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	r [cm]	
371.030.16.1	250	250	16	3	42	
372.030.16.1	300	315	17	3	47.3	

Geberit HDPE bend 45°**Application purposes**


- For building drainage

Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD			
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	
360.045.16.1	40	40	4	2	
361.045.16.1	50	50	4.5	2	
363.045.16.1	56	56	4.5	2	
364.045.16.1	60	63	5	2	
365.045.16.1	70	75	5	2	
366.045.16.1	90	90	5.5	2	
367.045.16.1	100	110	6	2.5	
368.045.16.1	125	125	6.5	2.5	
369.045.16.1	150	160	6.9	2	

Geberit HDPE bend 45°**Application purposes**


- For building drainage

Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD			
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	r [cm]
370.045.16.1	200	200	18	2.5	20

Geberit HDPE bend 45° with large leg**Application purposes**


- For building drainage

Characteristics

- Can be welded on both sides with electrofusion coupling
- Wide radius
- UV-resistant

Technical data

Material		PE-HD					
Art. no.	DN	d, ø [mm]	X1 [cm]	X2 [cm]	K1 [cm]	K2 [cm]	
365.046.16.1	70	75	9.1	5	6	2	
367.046.16.1	100	110	14.7	6	11	2.5	

Geberit HDPE segment bend 45°**Application purposes**

- For building drainage


Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD			
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	r [cm]
371.045.16.1	250	250	16.5	3	29
372.045.16.1	300	315	18	3	32.5

Geberit HDPE bend 88.5°

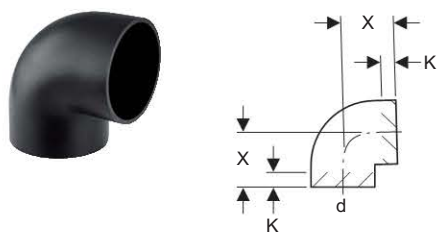

Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material		PE-HD			
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	
361.088.16.1	50	50	6	2	
363.088.16.1	56	56	6.5	2	
364.088.16.1	60	63	7	2	
365.088.16.1	70	75	7.5	2	
366.088.16.1	90	90	8	2	
367.088.16.1	100	110	9.5	2.5	
368.088.16.1	125	125	10	2.5	
369.088.16.1	150	160	12	2.5	

Geberit HDPE segment bend 90°

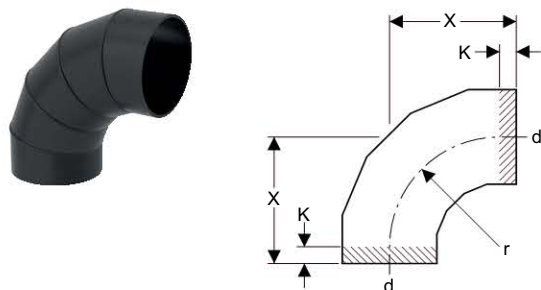

Application purposes

- For building drainage


Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD			
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	r [cm]
371.055.16.1	250	250	33.5	3	29
372.055.16.1	300	315	37	3	32.5

Geberit HDPE bend 90°

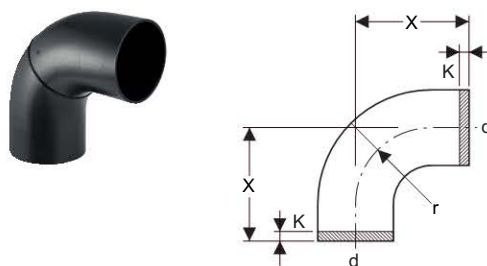

Application purposes

- For building drainage


Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

Technical data

Material		PE-HD			
Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	r [cm]
370.055.16.1	200	200	30	2.5	20

Geberit HDPE bend 90° with large leg

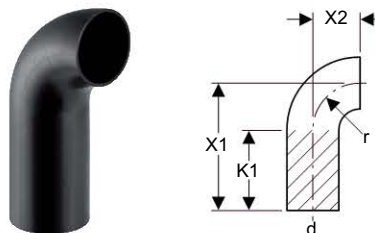

Application purposes


- For building drainage

Characteristics

- Wide radius
- UV-resistant

Technical data

Material				PE-HD		
Art. no.	DN	d, ø [mm]	X1 [cm]	X2 [cm]	K1 [cm]	r [cm]
379.055.16.1	30	32	10	3	7	3
360.055.16.1	40	40	15	3	12	3
361.055.16.1	50	50	18	4	14	4
363.055.16.1	56	56	21	4	17	4
364.055.16.1	60	63	21	5	16	5
365.055.16.1	70	75	21	7	14	7
366.055.16.1	90	90	24	9	15	9
367.055.16.1	100	110	27	10	17	10
368.055.16.1	125	125	20	11	9	11
369.055.16.1	150	160	20	14.5	6	14

Geberit HDPE bend 90°, reduced, without leg**Application purposes**

- For building drainage

Characteristics

- Wide radius
- UV-resistant


Technical data

Material	PE-HD
----------	-------

Art. no.	d, ø [mm]	d1, ø [mm]	X [cm]	r [cm]
361.872.16.1	50	40	4	4
363.873.16.1	56	50	4	4
364.873.16.1	63	50	5	5
364.874.16.1	63	56	5	5

1.2.2 Branch fittings

Geberit HDPE branch fitting 45°



Application purposes

- For building drainage

Characteristics

- UV-resistant


Technical data

Material								PE-HD		
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
379.108.16.1	30 / 30	32	32	10.5	3.5	7	7	2	2	2
360.108.16.1	40 / 30	40	32	13.5	4.5	9	9	3	3.5	3.5
360.109.16.1	40 / 40	40	40	13.5	4.5	9	9	2.5	3	3
361.109.16.1	50 / 40	50	40	16.5	5.5	11	11	4	4.5	4.5
361.112.16.1	50 / 50	50	50	16.5	5.5	11	11	3.5	2	2
363.112.16.1	56 / 50	56	50	18	6	12	12	4	3	3
363.115.16.1	56 / 56	56	56	18	6	12	12	4	2.5	2.5
364.109.16.1	60 / 40	63	40	19.5	6.5	13	13	4.5	4.5	4
364.112.16.1	60 / 50	63	50	19.5	6.5	13	13	5	3	3
364.115.16.1	60 / 56	63	56	19.5	6.5	13	13	4.5	2.5	2.5
364.120.16.1	60 / 60	63	63	19.5	6.5	13	13	4	2	2
365.109.16.1	70 / 40	75	40	21	7	14	14	6.5	5	6
365.112.16.1	70 / 50	75	50	21	7	14	14	6	3	4
365.115.16.1	70 / 56	75	56	21	7	14	14	5.5	2.5	3.5
365.120.16.1	70 / 60	75	63	21	7	14	14	4.5	2.5	3.5
365.125.16.1	70 / 70	75	75	21	7	14	14	4	2.5	2.5
366.109.16.1	90 / 40	90	40	24	8	16	16	7.5	5.5	6.5
366.112.16.1	90 / 50	90	50	24	8	16	16	8	4	5
366.115.16.1	90 / 56	90	56	24	8	16	16	7.5	3.5	4.5
366.120.16.1	90 / 60	90	63	24	8	16	16	7	3	4
366.125.16.1	90 / 70	90	75	24	8	16	16	6.5	3	3.5
366.130.16.1	90 / 90	90	90	24	8	16	16	5	2	2
367.109.16.1	100 / 40	110	40	27	9	18	18	9.5	6	7.5
367.112.16.1	100 / 50	110	50	27	9	18	18	9.5	5	5.5
367.115.16.1	100 / 56	110	56	27	9	18	18	9	4	4.5
367.120.16.1	100 / 60	110	63	27	9	18	18	8.5	3.5	4
367.125.16.1	100 / 70	110	75	27	9	18	18	7.5	3	3.5
367.130.16.1	100 / 90	110	90	27	9	18	18	6.5	2.5	3
367.135.16.1	100 / 100	110	110	27	9	18	18	5.5	2	2
368.120.16.1	125 / 60	125	63	30	10	20	20	10.5	4.5	6
368.125.16.1	125 / 70	125	75	30	10	20	20	9.5	4	5
368.130.16.1	125 / 90	125	90	30	10	20	20	8.5	3	3.5
368.135.16.1	125 / 100	125	110	30	10	20	20	7	2.5	2.5
368.139.16.1	125 / 125	125	125	30	10	20	20	6	2	2
369.125.16.1	150 / 70	160	75	37.5	12.5	25	25	13.5	6.5	7.5
369.130.16.1	150 / 90	160	90	37.5	12.5	25	25	12.5	5.5	6.5
369.135.16.1	150 / 100	160	110	37.5	12.5	25	25	11	4.5	5.5
369.139.16.1	150 / 125	160	125	37.5	12.5	25	25	10	4	5

Branch fittings

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
369.145.16.1	150 / 150	160	160	37.5	12.5	25	25	7.5	2.5	2.5
370.125.16.1	200 / 70	200	75	54	18	36	36	18	14	12
370.135.16.1	200 / 100	200	110	54	18	36	36	15	14	6.5
370.139.16.1	200 / 125	200	125	54	18	36	36	14	13	5.5
370.145.16.1	200 / 150	200	160	54	18	36	36	11.5	8.5	3.5
370.146.16.1	200 / 200	200	200	54	18	36	36	8.5	1	1
371.135.16.1	250 / 100	250	110	66	22	44	44	21.5	13.5	15
371.139.16.1	250 / 125	250	125	66	22	44	44	20.5	17.5	14
371.145.16.1	250 / 150	250	160	66	22	44	44	18	13	5
371.146.16.1	250 / 200	250	200	66	22	44	44	15	5	9
371.147.16.1	250 / 250	250	250	66	22	44	44	11.5	5.5	5.5
372.135.16.1	300 / 100	315	110	84	28	56	56	30.5	26	23.5
372.139.16.1	300 / 125	315	125	84	28	56	56	29	25	22
372.145.16.1	300 / 150	315	160	84	28	56	56	27	20.5	20
372.146.16.1	300 / 200	315	200	84	28	56	56	24	12.5	17.5
372.147.16.1	300 / 250	315	250	84	28	56	56	20.5	13	14
372.148.16.1	300 / 300	315	315	84	28	56	56	16	9.5	9.5

Geberit HDPE branch fitting 88.5°



Application purposes

- For building drainage


Characteristics

- Swept entry
- UV-resistant

Technical data

Material								PE-HD		
Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	h [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K3 [cm]
367.163.16.1	100 / 100	110	110	22.5	13.8	13.5	11.5	9	3.5	3.5

Geberit HDPE branch fitting 88.5°



Application purposes

- For building drainage

Characteristics

- UV-resistant


Technical data

Material									PE-HD		
Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]	
379.158.16.1	30 / 30	32	32	8.5	5	3.5	3.5	2.5	1	1	
360.158.16.1	40 / 30	40	32	13	7.5	5.5	5.5	5	2.5	2	
360.159.16.1	40 / 40	40	40	13	7.5	5.5	5.5	4.5	2.5	2.5	
361.159.16.1	50 / 40	50	40	15	9	6	6	6	2.5	3	
361.162.16.1	50 / 50	50	50	15	9	6	6	5.5	2.5	2.5	
363.162.16.1	56 / 50	56	50	17.5	10.5	7	7	7	3	3.5	
363.165.16.1	56 / 56	56	56	17.5	10.5	7	7	6.5	3	3	
364.159.16.1	60 / 40	63	40	17.5	10.5	7	7	7	3	3	
364.162.16.1	60 / 50	63	50	17.5	10.5	7	7	7	3	3.5	
364.165.16.1	60 / 56	63	56	17.5	10.5	7	7	6.5	3	3	
364.170.16.1	60 / 60	63	63	17.5	10.5	7	7	6	3	3	
365.159.16.1	70 / 40	75	40	17.5	10.5	7	7	7.5	2.5	4	
365.162.16.1	70 / 50	75	50	17.5	10.5	7	7	7	2.5	3.5	
365.165.16.1	70 / 56	75	56	17.5	10.5	7	7	6.5	2.5	3	
365.170.16.1	70 / 60	75	63	17.5	10.5	7	7	6	2.5	2.5	
365.175.16.1	70 / 70	75	75	17.5	10.5	7	7	5.5	2.5	2.5	
366.159.16.1	90 / 40	90	40	20	12	8	8	8.5	2.5	4.5	
366.162.16.1	90 / 50	90	50	20	12	8	8	8.5	2.5	4.5	
366.165.16.1	90 / 56	90	56	20	12	8	8	8	2.5	4	
366.170.16.1	90 / 60	90	63	20	12	8	8	7.5	2.5	3.5	
366.175.16.1	90 / 70	90	75	20	12	8	8	7	2.5	3	
366.180.16.1	90 / 90	90	90	20	12	8	8	6.5	2.5	2.5	
367.159.16.1	100 / 40	110	40	22.5	13.5	9	9	10	2.5	6	
367.162.16.1	100 / 50	110	50	22.5	13.5	9	9	9.5	2.5	5	
367.165.16.1	100 / 56	110	56	22.5	13.5	9	9	9	2.5	4.5	
367.170.16.1	100 / 60	110	63	22.5	13.5	9	9	9	2.5	4	
367.175.16.1	100 / 70	110	75	22.5	13.5	9	9	8.5	2.5	3.5	
367.180.16.1	100 / 90	110	90	22.5	13.5	9	9	7.5	2.5	3	
367.185.16.1	100 / 100	110	110	22.5	13.5	9	9	6.5	2	2	
368.162.16.1	125 / 50	125	50	25	15	10	10	11	2.5	6	
368.165.16.1	125 / 56	125	56	25	15	10	10	10.5	2.5	5.5	
368.170.16.1	125 / 60	125	63	25	15	10	10	10.5	2.5	5	
368.175.16.1	125 / 70	125	75	25	15	10	10	10	2.5	4.5	
368.180.16.1	125 / 90	125	90	25	15	10	10	9	2.5	4	
368.185.16.1	125 / 100	125	110	25	15	10	10	8	2	3	
368.189.16.1	125 / 125	125	125	25	15	10	10	7	2	2	
369.175.16.1	150 / 70	160	75	35	21	14	14	15	4.5	8	
369.185.16.1	150 / 100	160	110	35	21	14	14	13.5	4.5	6	
369.195.16.1	150 / 150	160	160	35	21	14	14	10.5	3.5	3	

Branch fittings

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
370.180.16.1	200 / 90	200	90	36	18	18	18	7	6	7
370.185.16.1	200 / 100	200	110	36	18	18	18	7	6	7
370.195.16.1	200 / 150	200	160	36	18	18	18	4.5	5	4.5
370.196.16.1	200 / 200	200	200	40	20	20	20	2.5	3	2.5
371.185.16.1	250 / 100	250	110	44	22	22	22	11	7.5	11
371.189.16.1	250 / 125	250	125	44	22	22	22	10.5	7.5	10.5
371.195.16.1	250 / 150	250	160	44	22	22	22	8.5	6.5	8.5
371.196.16.1	250 / 200	250	200	48	24	24	24	6.5	4	6.5
371.197.16.1	250 / 250	250	250	48	24	24	24	4	4	4
372.185.16.1	300 / 100	315	110	56	28	28	28	17	10	17
372.189.16.1	300 / 125	315	125	56	28	28	28	16.5	10	16.5
372.195.16.1	300 / 150	315	160	56	28	28	28	14.5	9	14.5
372.196.16.1	300 / 200	315	200	56	28	28	28	12	6.5	12
372.197.16.1	300 / 250	315	250	56	28	28	28	9.5	6.5	9.5
372.198.16.1	300 / 300	315	315	56	28	28	28	7	6.5	7

Geberit HDPE double branch fitting 45°



Application purposes

- For building drainage
- For vertical installation

Characteristics


- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
367.209.16.1		110	40	27	9	18	18	9.5	6	7.5
367.212.16.1		110	50	27	9	18	18	9.5	6	7.5
367.235.16.1	100 / 100	110	110	27	9	18	18	5	1.5	1.5

Geberit HDPE double branchball 88.5°, connections 90° offset

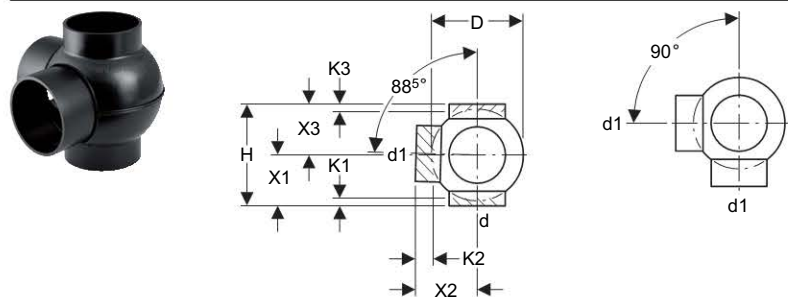

Application purposes

- For building drainage

Characteristics


- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
364.320.16.1	60 / 60	63	63	10	16	8	10	8	1.5	4.5	1.5
365.325.16.1	70 / 70	75	75	12	16	8	10	8	1.5	3.5	1.5
366.330.16.1	90 / 90	90	90	14	18	9	11	9	2	4	2
367.315.16.1	100 / 56	110	56	17	20	10	12	10	1.5	1.5	1.5
367.320.16.1		110	63	17	20	10	12	10	1.5	1.5	1.5
367.325.16.1	100 / 70	110	75	17	20	10	12	10	1.5	1.5	1.5
367.330.16.1	100 / 90	110	90	17	20	10	12	10	1.5	1.5	1.5
367.335.16.1	100 / 100	110	110	17	20	10	12	10	1.5	4	1.5
368.335.16.1	125 / 100	125	110	18	20	10	12.5	10	1.5	4	1.5
369.335.16.1	150 / 100	160	110	23	25	12.5	16	12.5	2	1.5	2

Geberit HDPE double branchball 88.5°, connections 135° offset

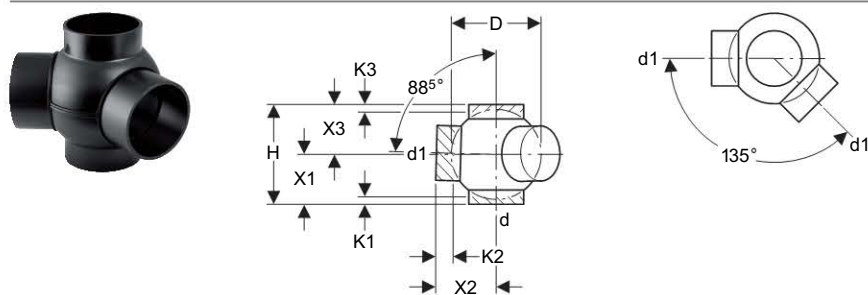

Application purposes

- For building drainage

Characteristics


- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
364.370.16.1		63	63	10	16	8	10	8	1.5	4.5	1.5
365.375.16.1	70 / 70	75	75	12	16	8	10	8	1.5	3.5	1.5
366.380.16.1	90 / 90	90	90	14	18	9	11	9	2	4	2
367.362.16.1	100 / 40	110	50	17	20	10	12	10	1.5	1.5	1.5
367.365.16.1	100 / 56	110	56	17	20	10	12	10	1.5	1.5	1.5
367.370.16.1	100 / 60	110	63	17	20	10	12	10	1.5	1.5	1.5
367.375.16.1	100 / 70	110	75	17	20	10	12	10	1.5	1.5	1.5
367.380.16.1	100 / 90	110	90	17	20	10	12	10	1.5	1.5	1.5
367.385.16.1	100 / 100	110	110	17	20	10	12	10	1.5	4	1.5
368.385.16.1	125 / 100	125	110	18	20	10	12.5	10	1.5	4	1.5
369.385.16.1	150 / 100	160	110	23	25	12.5	16	12.5	2	1.5	2

Geberit HDPE double branchball 88.5°, connections 180° offset

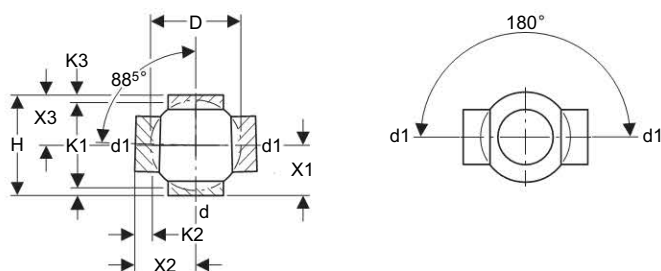

Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material										PE-HD	
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
364.270.16.1	60 / 60	63	63	10	16	8	10	8	1.5	4.5	1.5
365.275.16.1	70 / 70	75	75	12	16	8	10	8	1.5	3.5	1.5
366.280.16.1	90 / 90	90	90	14	18	9	11	9	2	4	2
367.262.16.1	100 / 40	110	50	17	20	10	12	10	1.5	1.5	1.5
367.265.16.1	100 / 56	110	56	17	20	10	12	10	1.5	1.5	1.5
367.270.16.1	100 / 60	110	63	17	20	10	12	10	1.5	1.5	1.5
367.275.16.1	100 / 70	110	75	17	20	10	12	10	1.5	1.5	1.5
367.280.16.1	100 / 90	110	90	17	20	10	12	10	1.5	1.5	1.5
367.285.16.1	100 / 100	110	110	17	20	10	12	10	1.5	4	1.5
368.285.16.1	125 / 100	125	110	18	20	10	12.5	10	1.5	4	1.5
369.285.16.1	150 / 100	160	110	23	25	12.5	16	12.5	2	1.5	2

Geberit HDPE triple branchball 88.5°, connections 90° offset

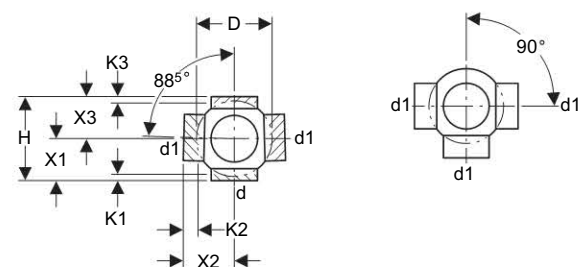

Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material										PE-HD	
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
364.605.16.1	60 / 60	63	63	10	16	8	10	8	1.5	4.5	1.5
365.605.16.1	70 / 70	75	75	12	16	8	10	8	1.5	3.5	1.5
366.605.16.1	80 / 80	90	90	14	18	9	11	9	2	4	2
367.605.16.1	100 / 100	110	110	17	20	10	12	10	1.5	4	1.5
368.605.16.1	125 / 100	125	110	18	20	10	12	10	1.5	4	1.5
369.605.16.1	150 / 100	160	110	23	25	12.5	16	12.5	2	1.5	2

Geberit HDPE triple branchball 88.5°, connections 135° offset

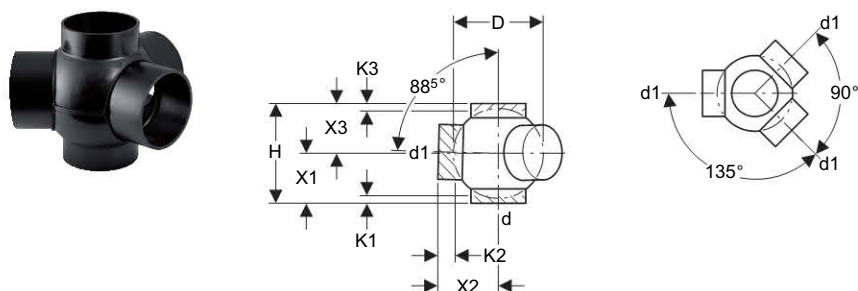

Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material										PE-HD	
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
364.600.16.1		63	63	10	16	8	10	8	1.5	4.5	1.5
365.600.16.1	70 / 70	75	75	12	16	8	10	8	1.5	3.5	1.5
367.600.16.1	100 / 100	110	110	17	20	10	12	10	1.5	4	1.5
368.600.16.1	125 / 100	125	110	18	20	10	12	10	1.5	4	1.5

Geberit HDPE quadruple branchball 88.5°, connections 90° offset

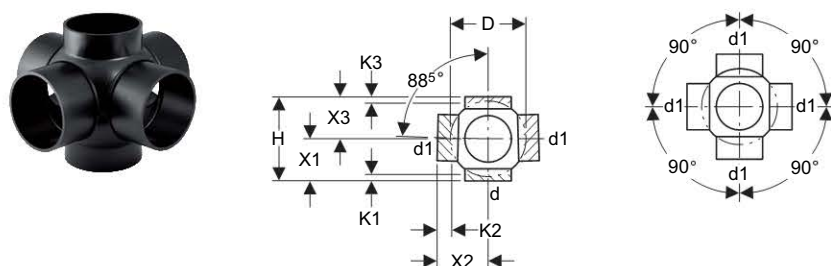

Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material										PE-HD	
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K2 [cm]	K3 [cm]
364.610.16.1	60 / 60	63	63	10	16	8	10	8	1.5	4.5	1.5
365.610.16.1	70 / 70	75	75	12	16	8	10	8	1.5	3.5	1.5
367.610.16.1	100 / 100	110	110	17	20	10	12	10	1.5	4	1.5
368.610.16.1	125 / 100	125	110	18	20	10	12.5	10	1.5	4	1.5

Geberit HDPE quadruple branch fitting 88.5°

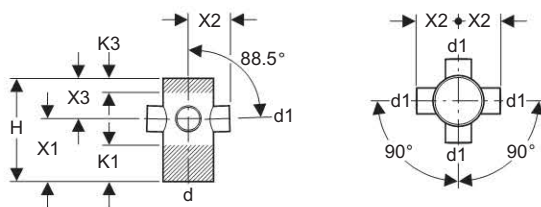

Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material		PE-HD						
Art. no.	d, Ø [mm]	d1, Ø [mm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 [cm]	K3 [cm]
367.445.16.1	110	56	22.5	13.5	9	9	7.5	3

Geberit HDPE breeches branch fitting 2 x 30°



Application purposes

- For building drainage
- For vertical installation


Characteristics

- UV-resistant

Technical data

Material						PE-HD	
Art. no.	DN	d, ø [mm]	d1, ø [mm]	X1 [cm]	X2 [cm]	K1 [cm]	K2 [cm]
361.459.16.1	50 / 40	50	40	5.5	11	4	5
361.462.16.1	50 / 50	50	50	5.5	11	3	4
363.462.16.1	56 / 50	56	50	6	12	4	5
363.465.16.1	56 / 56	56	56	1.8	5.3	0	0
364.462.16.1	60 / 50	63	50	6.5	13	5	6
364.465.16.1	60 / 56	63	56	6.5	13	4	6
365.465.16.1	70 / 56	75	56	7	14	6	7
365.470.16.1	70 / 60	75	63	7	14	5	6
367.480.16.1	100 / 90	110	90	9	18	7	7
367.481.16.1	100 / 100	110	110	9	10.2	5	

Geberit breeches branch fitting 2 x 90°



Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For vertical installation

Characteristics

- Fitting welded
- Abrasion resistant
- Sound-absorbing
- UV-resistant


Technical data

Thermal expansion	0.17 mm/(m*K)
Thermal conductivity pipe	0.43 W/(m*K)
Material	PE-S2

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	a [cm]	H [cm]	K [cm]
308.480.14.1	90 / 90	90	90	30	15	17.5	3

1.2.3 Reducers

Geberit HDPE reducer, eccentric, short



Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material					PE-HD			
Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	H [cm]	h [cm]	h1 [cm]	K [cm]
361.558.16.1	50 / 40	50	40	0.5	8	3.7	3.5	2
363.558.16.1	56 / 40	56	40	0.8	8	3.7	3.5	2
363.561.16.1	56 / 50	56	50	0.3	8	3.7	3.5	2
364.558.16.1	60 / 40	63	40	1.15	8	3.7	3.5	2
364.561.16.1	60 / 50	63	50	0.65	8	3.7	3.5	2
364.566.16.1	60 / 56	63	56	0.35	8	3.7	3.5	2
365.558.16.1	70 / 40	75	40	1.75	8	3.7	3.5	2
365.561.16.1	70 / 50	75	50	1.25	8	3.7	3.5	2
365.566.16.1	70 / 56	75	56	0.95	8	3.7	3.5	2
365.571.16.1	70 / 60	75	63	0.6	8	3.7	3.5	2
366.561.16.1	90 / 50	90	50	2	8	3.7	3.5	2
366.566.16.1	90 / 56	90	56	1.7	8	3.7	3.5	2
366.571.16.1	90 / 60	90	63	1.3	8	3.7	3.5	2
366.576.16.1	90 / 70	90	75	0.75	8	3.7	3.5	2
367.558.16.1	100 / 40	110	40	3.4	8	3.7	3.5	2
367.561.16.1	100 / 50	110	50	2.9	8	3.7	3.5	2
367.566.16.1	100 / 56	110	56	2.6	8	3.7	3.5	2
367.571.16.1	100 / 60	110	63	2.2	8	3.7	3.5	2
367.576.16.1	100 / 70	110	75	1.6	8	3.7	3.5	2
367.581.16.1	100 / 90	110	90	0.9	8	3.7	3.5	2
368.561.16.1	125 / 50	125	50	3.6	8	3.7	3.5	2
368.566.16.1	125 / 56	125	56	3.3	8	3.7	3.5	2
368.571.16.1	125 / 60	125	63	2.9	8	3.7	3.5	2
368.576.16.1	125 / 70	125	75	2.3	8	3.7	3.5	2
368.581.16.1	125 / 90	125	90	1.6	8	3.7	3.5	2
368.586.16.1	125 / 100	125	110	0.7	8	3.7	3.5	2
369.586.16.1	150 / 100	160	110	2.3	8	3.5	3.7	2
369.588.16.1	150 / 125	160	125	1.6	8	3.5	3.7	2
369.591.16.1	150 / 140	160	140	1	8	3.5	3.7	2

Geberit HDPE reducer, eccentric, long



Application purposes

- For building drainage


Characteristics

- UV-resistant

Technical data

Material		PE-HD							
Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	L [cm]	l1 [cm]	l2 [cm]	K1 [cm]	K2 [cm]
368.584.16.1	125 / 100	125	110	0.7	16	7	6.4	4	3
369.584.16.1	150 / 100	160	110	2.5	28	9.4	6.4	6	3
369.587.16.1	150 / 125	160	125	1.7	24	9.4	8	6	5
370.584.16.5	200 / 100	200	110	4.3	28	11.5	3.7	4	0
370.587.16.5	200 / 125	200	125	3.6	28	11.5	3.7	4	0
370.594.16.5	200 / 150	200	160	2	28	11.9	9.1	4	6
371.596.16.1	250 / 200	250	200	2.5	40.5	15.8	15.7	8	8
372.596.16.1	300 / 200	315	200	5.7	58	16.1	15.7	8	8
372.598.16.1	300 / 250	315	250	3.2	43.5	16.1	15.7	8	8

Geberit HDPE reducer, concentric, short



Application purposes

- For building drainage

Characteristics

- UV-resistant

Technical data


Material		PE-HD				
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	K [cm]
360.557.16.1	40 / 30	40	32	8	3	1.5
361.557.16.1	50 / 30	50	32	8	3	1.5
361.559.16.1		50	40	8	3	1.5
363.510.16.1		56	48	4		
363.559.16.1		56	40	8	3	1.5
363.560.16.1		56	50	8	3	1.5
364.559.16.1		63	40	8	3	1.5
364.560.16.1		63	50	8	3	1.5
364.565.16.1		63	56	8	3	1.5
365.559.16.1	70 / 40	75	40	8	3	1.5
365.560.16.1		75	50	8	3	1.5
365.565.16.1		75	56	8	3	1.5
365.570.16.1		75	63	8	3	1.5

Access pipes

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	h [cm]	K [cm]
366.559.16.1		90	40	8	3	1.5
366.560.16.1		90	50	8	3	1.5
366.565.16.1		90	56	8	3	1.5
366.570.16.1		90	63	8	3	1.5
366.575.16.1		90	75	8	3	1.5
367.559.16.1		110	40	8	3	1.5
367.560.16.1		110	50	8	3	1.5
367.565.16.1		110	56	8	3	1.5
367.570.16.1		110	63	8	3	1.5
367.575.16.1		110	75	8	3	1.5
367.580.16.1	100 / 90	110	90	8	3	1.5
368.570.16.1		125	63	8	3	1.5
368.575.16.1		125	75	8	3	1.5
368.580.16.1		125	90	8	3	1.5
368.585.16.1		125	110	8	3	1.5
369.535.16.1		160	110	4	0.6	

1.2.4 Access pipes

Geberit HDPE access pipe 45° with round service opening



Application purposes

- For building drainage

Characteristics

- UV-resistant

Technical data


Material	PE-HD
----------	-------

Scope of delivery

- Seal made of EPDM
- Cap made of PP

Art. no.	d, Ø [mm]	d1, Ø [mm]	A [cm]	a [cm]	H [cm]	X1 [cm]	X3 [cm]	K1 [cm]
367.453.16.1	110	110	19.5	6.5	27	9	18	5.5
368.453.16.1	125	110	20	7	30	10	20	7
369.453.16.1	160	110	22	9	37.5	12.5	25	11

Geberit HDPE access pipe 90° with round service opening



Application purposes

- For building drainage

Characteristics

- UV-resistant

Technical data


Material	PE-HD
----------	-------

Scope of delivery

- Seal made of EPDM
- Cap made of PP

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	H [cm]	X1 [cm]	X3 [cm]	K1 [cm]	K3 [cm]
364.451.16.1	60 / 60	63	63	9	17.5	10.5	7	4.5	1
365.451.16.1	70 / 70	75	75	9.5	17.5	10.5	7	3.5	0
366.451.16.1	90 / 90	90	90	11	20	12	8	3	0
367.451.16.1	100 / 100	110	110	9	24	13.5	10.5	4.5	0
368.451.16.1	125 / 100	125	110	13	25	15	10	6	1
369.451.16.1	150 / 100	160	110	15	35	21	14	12	4

Geberit HDPE access pipe 90° with oval service opening



Application purposes

- For building drainage

Characteristics

- UV-resistant

Technical data

Material	PE-HD
----------	-------


Scope of delivery

- Seal made of EPDM
- 1 cover, grey cast iron, dip-coated black

Art. no.	DN	d, ø [mm]	A [cm]	H [cm]	h [cm]	X [cm]	K [cm]
367.454.16.1	100	110	12	40	28	20	3
368.454.16.1	125	125	12.5	41	28	20.5	4
369.454.16.1	150	160	14	43	28	21.5	4
370.454.16.1	200	200	17.5	65	38	32.5	5.5
371.454.16.1	250	250	20	58	38	29	3
372.454.16.1	300	315	23	62	38	31	8

1.2.5 Adapters

Geberit HDPE adapter socket



Application purposes

- For building drainage
- Suitable exclusively for connecting connection bends for WCs

Characteristics



- Pluggable for multiple combinations
- With lip seal made of EPDM
- UV-resistant

Technical data

Material	PE-HD			
Art. no.	DN	d1, Ø [mm]	d2, Ø [mm]	
367.928.16.1	90 / 100	90	110	

1.2.6 Special fittings

Geberit HDPE Sovent fitting



Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)


Characteristics

- Six connection options, closed
- UV-resistant

Technical data

Maximum discharge rate	12 l/s															
Material	PE-HD															
Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	d2, Ø [mm]	a [cm]	B [cm]	b [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	L [cm]	l [cm]	l1 [cm]	l2 [cm]	
367.614.16.1	100 / 100 / 70	110	110	75	13	18	8	74	21.5	17	35.5	29	10.5	5.5	9.5	

Geberit HDPE Sovent fitting

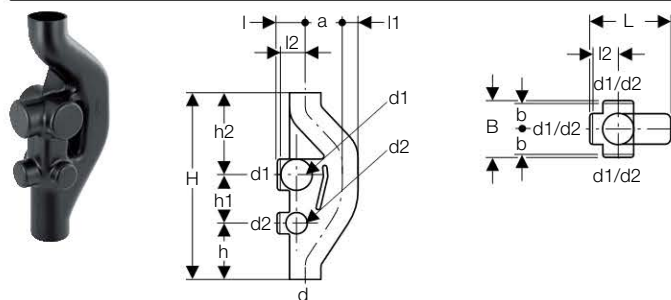

Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)

Characteristics

- Six connection options, closed
- UV-resistant

Technical data

Maximum discharge rate	17 l/s
Material	PE-HD

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	a [cm]	B [cm]	b [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	L [cm]	l [cm]	l1 [cm]	l2 [cm]
369.001.16.1	150 / 100 / 70	160	110	75	13.3	23	9.5	71	19	17	35	34.3	13	8	11

Geberit HDPE protecting cap for weathering slates



Application purposes

- For building drainage
- For enclosing ventilation pipes
- For sliding on

Characteristics


- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	d, ø [mm]	D [cm]	H [cm]
364.989.16.1	63	10	7
365.989.16.1	75	12	9
366.989.16.1	90	14	10
367.989.16.1	110	17	11
368.989.16.1	125	18	12
369.989.16.1	160	23	16

Geberit HDPE waste manifold

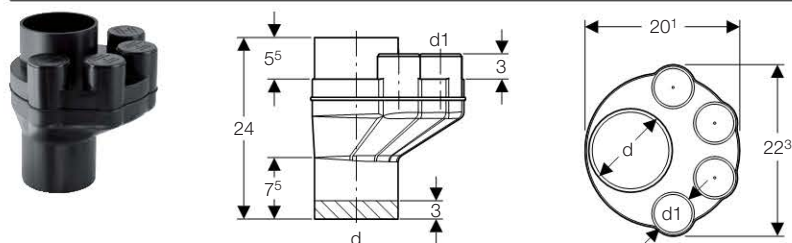

Application purposes

- For building drainage

Technical data

Material	PE-HD
----------	-------

Characteristics


- Four connection options, closed
- UV-resistant

Art. no.	d, ø [mm]	d1, ø [mm]
367.612.16.1	110	56

1.3 Connections

1.3.1 Welding joints

Geberit electrofusion coupling



Application purposes

- For building drainage
- For high-tensile, permanent connection of pipes and fittings

Characteristics


- Can be welded with Geberit electrofusion machine ESG 40/160, ESG 40/200 and ESG 3
- UV-resistant

Technical data

Installation temperature	-10 - +40 °C
Material	PE-HD

Art. no.	DN	d, ø [mm]	D [cm]	H [cm]	E [cm]	X [cm]
360.771.16.1	40	40	5.2	6	2.8	0.3
361.771.16.1	50	50	6.2	6	2.8	0.3
363.771.16.1	56	56	6.8	6	2.8	0.3
364.771.16.1	60	63	7.6	6	2.8	0.3
365.771.16.1	70	75	8.9	6	2.8	0.3
366.771.16.1	90	90	10.4	6	2.8	0.3
367.771.16.1	100	110	12.5	6	2.8	0.3
368.771.16.1	125	125	14.2	6	2.8	0.3
369.771.16.1	150	160	17.8	6	2.8	0.3

Geberit HDPE electrofusion coupling with integrated thermal fuse



Application purposes

- For high-tensile, permanent connection of pipes and fittings

Characteristics

- With integrated thermal fuse
- Can be welded with Geberit starter switch ESG-T2
- Can be welded with Geberit electrofusion machines ESG 3
- Heat-insulated
- UV-resistant

Technical data

Installation temperature	-10 - +40 °C
Material	PE-HD


Art. no.	DN	d, ø [mm]	D [cm]	H [cm]	E [cm]
370.775.16.1	200	200	22.4	15	7.5
371.775.16.1	250	250	27.5	15	7.5
372.775.16.1	300	315	34.3	15	7.5

Accessories

- Geberit accessories set for electrofusion with integrated thermal fuse → p. 367

1.3.2 Push-in connections

Geberit HDPE expansion socket with double flange



Application purposes

- For building drainage
- For horizontal and vertical installation

Characteristics

- Double flange for supporting the pipe bracket
- With seal made of EPDM
- UV-resistant

Technical data


Material	PE-HD
----------	-------

Scope of delivery

- 1 protective cap

Art. no.	DN	d, Ø [mm]	D [cm]	H [cm]	h [cm]	E [cm]	I [cm]	K [cm]
379.791.16.1	30	32	4.6	12.8	3.9	4 - 5.5	3	0
360.700.16.1	40	40	5.5	23.7	6.8	7 - 10	3	3
361.700.16.1	50	50	6.7	24	6.8	7 - 10	3	3
363.700.16.1	56	56	7.4	24	6.8	7 - 10	3	3
364.700.16.1	60	63	8.3	24.3	6.8	7 - 10.5	3	3
365.700.16.1	70	75	9.7	24.6	6.8	8 - 10.5	3	3
366.700.16.1	90	90	11.3	24.9	6.9	8 - 10.5	3	3
367.700.16.1	100	110	13.6	25.6	7.3	8 - 10.5	3	3.5
368.700.16.1	125	125	15.7	26.1	7.4	8 - 11	3	3.5
369.700.16.1	150	160	19.5	26.8	7.4	8 - 11.5	3	3.5

Geberit HDPE expansion socket



Application purposes

- For building drainage
- For horizontal and vertical installation

Characteristics


- With seal made of EPDM
- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	DN	d, Ø [mm]	D [cm]	H [cm]	h [cm]	E [cm]	K [cm]
370.700.16.1	200	200	25	40	12.5	17 - 20.5	11
371.700.16.1	250	250	29.1	42.5	17	17 - 20.5	14
372.700.16.1	300	315	36.1	45.8	17.5	17 - 20.5	14

Geberit HDPE ring seal socket



Application purposes

- For building drainage

Characteristics

- With round cord ring made of EPDM
- UV-resistant

Technical data


Material	PE-HD
----------	-------

Scope of delivery

- 1 protective cap

Art. no.	DN	d, Ø [mm]	D [cm]	H [cm]	h [cm]
360.779.16.1	40	40	5.7	6.3	2
361.779.16.1	50	50	6.7	6.3	2
363.779.16.1	56	56	7.2	6.4	2
364.779.16.1	60	63	8	6.5	2
365.779.16.1	70	75	9.2	8.8	2.5
366.779.16.1	90	90	10.8	8.8	2.5
367.779.16.1	100	110	13.1	8.8	2.5
368.779.16.1	125	125	14.9	8.8	2.5
369.779.16.1	150	160	18.8	12.3	3

Geberit HDPE ring seal socket, reduced



Application purposes

- For building drainage

Characteristics

- With round cord ring made of EPDM
- UV-resistant

Technical data

Material	PE-HD
----------	-------


Scope of delivery

- 1 protective cap

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	D [cm]	H [cm]
361.752.16.1	56 / 50	57	50	6.7	4
364.752.16.1	60 / 56	63	56	7.2	4.4

1.3.3 Adapters on other product materials

Geberit adapter clamping connector

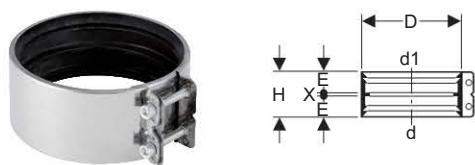

Application purposes

- For building drainage
- For connecting pipes and fittings made of the same or different product materials


Characteristics

- With seal made of EPDM

Technical data

Material		Stainless steel					
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	E [cm]	X [cm]
359.424.00.2	50	48-50	48-50	6.3	5.7	2.7	0.3
359.425.00.2	50	54-56	54-56	7.5	5.7	2.7	0.3
359.426.00.2	56	56	58	7.5	5.7	2.7	0.3
359.427.00.2	56	56	68	8.3	5.7	2.7	0.3
359.428.00.2	60	63	60	7.8	5.7	2.7	0.3
359.429.00.2	60	63-64	63-64	7.8	5.7	2.7	0.3
359.430.00.2	60	63-64	68	8.3	5.7	2.7	0.3
359.431.00.2	70	68	68	8.3	5.6	2.6	0.4
359.432.00.2	70	75	68	9	5.7	2.7	0.3
359.433.00.2	70	75-76	75-76	8.8	5.7	2.7	0.3
359.434.00.2	70	75-76	78	9.3	5.7	2.7	0.3
359.435.00.2	70	75-76	83-84	9.8	5.7	2.7	0.3
359.436.00.2	70	75-76	89-90	10.3	5.7	2.7	0.3
359.437.00.2	90	89-90	83-84	11.1	5.7	2.7	0.3
359.438.00.2	90	89-90	89-90	10.3	5.7	2.7	0.3
359.439.00.2	90	89-90	96	11.1	6.9	3.3	0.3
359.440.00.2	100	108-110	106	12.5	5.7	2.7	0.3
359.441.00.2	100	108-110	108-110	12.5	5.7	2.7	0.3
359.442.00.2	100	108-110	114-116	13.1	6.9	3.3	0.3
359.443.00.2	125	125	125	14	5.7	2.7	0.3
359.444.00.2	125	125	131-135	15	6.9	3.3	0.3
359.445.00.2	125	125	140-141	15.6	6.9	3.3	0.3
359.446.00.2	125	135	135	15	6.9	3.3	0.3
312.140.00.2	125	135	140	15.5	6.9	3.1	0.7
359.447.00.2	125	140-141	140-141	15.5	6.9	3.3	0.3
359.448.00.2	150	159-160	152	17.5	6.9	3.3	0.3
359.449.00.2	150	159-160	159-160	17.5	6.9	3.3	0.3
359.450.00.2	150	159-160	168	18.3	6.9	3.3	0.3
359.451.00.2	200	210	210	22.5	6.9	3.3	0.3

Geberit HDPE support ring

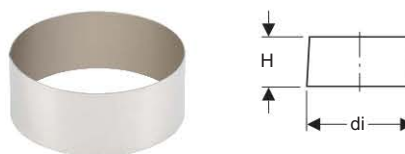

Application purposes

- For building drainage
- For supporting Geberit HDPE pipes and fittings when using a clamping connector or adapter clamping connector

Technical data

Material		CrNi steel 1.4301 (EN 10088)			
Art. no.	DN	d, ø [mm]	di, ø [mm]	H [cm]	
359.454.00.1	50	50	44	4	
359.455.00.1	56	56	50	4	
359.456.00.1	60	63	57	4	
359.457.00.1	70	75	69	4	
359.458.00.1	90	90	83	4	
359.459.00.1	100	110	101.4	4	
359.462.00.1	125	125	115.2	4	
359.463.00.1		140	129.2	4	
359.464.00.1	150	160	147.6	4	

Geberit HDPE straight adapter to lead



Application purposes

- For building drainage
- For soft and hard soldering
- For transitions from Geberit HDPE to lead

Technical data


Material	Brass
----------	-------

Scope of delivery

- Compression joint

Art. no.	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]
359.330.00.1	56	54	8.3	3.5

Geberit HDPE straight adapter to cast



Application purposes

- For building drainage
- For use with standard CV clamping connector


Characteristics

- Can be used without support ring
- Without socket
- UV-resistant

Technical data

Material		PE-HD				
Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	H [cm]	h [cm]	
370.738.16.1	200	200	212	16	8	
371.738.16.1	250	250	274	16	11.5	
372.738.16.1	300	315	326	16	11.5	

Geberit HDPE straight adapter to PVC



Application purposes

- For building drainage
- For transitions from Geberit HDPE to PVC with an inner diameter of 100–101 mm


Characteristics

- UV-resistant

Technical data

Material		PE-HD	
Art. no.	d, Ø [mm]	d1, Ø [mm]	
359.461.16.1	110	99	

Geberit HDPE straight adapter to stoneware



Application purposes

- For building drainage
- For inserting in stoneware couplings
- For connecting pipe ends with stoneware connectors
- For connecting seals and clamping connectors made of stoneware


Characteristics

- UV-resistant

Technical data

Material		PE-HD			
Art. no.	d, Ø [mm]	d1, Ø [mm]	H [cm]	h [cm]	
367.739.16.1	110	132	15.2	7	
368.739.16.1	125	159	15.5	7	
369.739.16.1	160	186	15.5	7	
370.739.16.1	200	242	20	13	
371.739.16.1	250	298	20	13	
372.739.16.1	315	352	20	12	

Geberit HDPE straight adapter with shrink-fitted sleeve

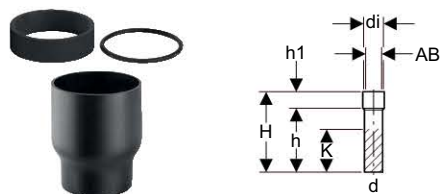

Application purposes

- For building drainage
- For shrinking on connection pieces and pipe ends

Characteristics

- UV-resistant

Technical data

Material	PE-HD
----------	-------


Scope of delivery

- Seal made of EPDM
- Round cord ring made of EPDM

Art. no.	DN	d, ø [mm]	AB1 [mm]	AB2 [mm]	di, ø [mm]	H [cm]	h [cm]	h1 [cm]	K [cm]
152.197.16.1	50	50	60 - 67	53 - 60	70	27.5	22	5.5	17
152.198.16.1	50	50	67 - 74	60 - 67	80	28.5	23	5.5	17
152.651.16.1	50	50	53 - 54	48 - 49	60	30	24	6	17
152.652.16.1	50	50	80 - 84	73 - 77	90	30.5	23.5	7	17
152.149.16.1	56	56	60 - 67	53 - 60	70	24.5	19	5.5	14
152.150.16.1	56	56	67 - 74	60 - 67	80	24.5	19	5.5	14
152.654.16.1	56	56	53 - 54		60	26.5	20.5	6	14
152.657.16.1	60	63	60 - 67		73	26.5	20.5	6	14
152.658.16.1	60	63	67 - 74		80	26.5	19	7.5	14
152.151.16.1	70	75	80 - 84	73 - 77	90	24.5	17.5	7	12
152.152.16.1	70	75	67 - 74		80	25	19	6	12
152.661.16.1	70	75	90 - 94		100	28	19	9	12
366.550.16.1	90	90	84 - 98		110	17	7	10	0
367.550.16.1	100	110	102 - 126	100 - 124	140	18	8	10	0
367.551.16.1	100	110	102 - 111	100 - 109	125	16	6	10	0
368.550.16.1	125	125	116 - 136	115 - 134	150	18	8	10	1
369.550.16.1	150	160	148 - 180	149 - 176	195	20	8	12	1
369.551.16.1	150	160	189 - 212	187 - 220	230	30	12	18	5
370.550.16.1	200	200	189 - 212	187 - 220	230	30	13	17	2
371.550.16.1	250	250	236 - 260	234 - 250	280	30	13	17	2
372.550.16.1	300	315	297 - 333	295 - 323	355	30	14	16	2

1.3.4 Screwing joints

Geberit HDPE threaded connector with compression joint



Application purposes

- For building drainage

Characteristics

- Union nut made of PP
- Compression ring made of PP
- Seal made of EPDM
- UV-resistant

Technical data


Material	PE-HD
----------	-------

Scope of delivery

- 1 protective cap

Art. no.	DN	d, ø [mm]	Rg ["]	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]
379.740.16.1	30	32	44 x 1/8	5.6	4.5	2.6	3	1
360.740.16.1	40	40	52 x 1/6	6.4	6.3	3.3	5	2
361.740.16.1	50	50	62 x 1/6	7.4	6.3	3.3	5	2
363.740.16.1	56	56	70 x 1/6	8.5	6.8	3.5	5	2
364.740.16.1	60	63	75 x 1/6	9	6.8	4.2	5	2
365.740.16.1	70	75	95 x 1/6	11.2	9.6	4.5	7.5	2.5
366.740.16.1	90	90	110 x 1/4	12.9	9.7	5	7.5	2.5
367.740.16.1	100	110	130 x 1/4	14.9	9.7	6.5	7.5	2.5

Geberit HDPE threaded connector with screw cap



Application purposes

- For building drainage

Characteristics


- With seal made of EPDM
- Cap made of PP
- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	DN	d, ø [mm]	Rg ["]	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]
379.750.16.1	30	32	44 x 1/8	5.6	4.5	2.6	3	1
360.750.16.1	40	40	52 x 1/6	6.4	6.3	3.3	5	2
361.750.16.1	50	50	62 x 1/6	7.4	6.3	3.3	5	2
363.750.16.1	56	56	70 x 1/6	8.5	6.8	3.5	5	2
364.750.16.1	60	63	75 x 1/6	9	6.8	4.2	5	2
365.750.16.1	70	75	95 x 1/6	11.2	9.6	4.5	7.5	2.5
366.750.16.1	90	90	110 x 1/4	12.9	9.7	4.8	7.5	2.5
367.750.16.1	100	110	130 x 1/4	14.9	9.7	6.3	7.5	2.5

Geberit HDPE threaded connector with screw cap



Application purposes

- For building drainage
- For cleaning and checking pipe sections

Characteristics

- Round opening
- With seal made of EPDM
- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	d, ø [mm]	Rg ["]	D [cm]	H [cm]
367.471.16.1	110	130 x 1/4	14.3	4

Geberit HDPE compression joint



Application purposes

- For building drainage

Scope of delivery

- Seal made of EPDM
- Compression ring made of PP
- Union nut made of PP

Art. no.	d, Ø [mm]	Rg ["]	D [cm]	H [cm]
363.749.16.1	56	70 x 1/6	8.5	6.8
364.749.16.1	63	75 x 1/6	9	6.8

Geberit HDPE adapter with male thread



Application purposes

- For building drainage


Characteristics

- With support ring made of chrome nickel steel
- UV-resistant

Technical data

Material		PE-HD		
Art. no.	DN	d, Ø [mm]	R ["]	H [cm]
361.726.16.1	50	50	1 1/4	6
361.727.16.1	50	50	1 1/2	6
363.728.16.1	56	56	2	6.5
364.728.16.1	60	63	2	6.5
365.729.16.1	70	75	2 1/2	7

Geberit HDPE adapter with female thread



Application purposes

- For building drainage

Characteristics

- With support ring made of chrome nickel steel
- UV-resistant

Technical data

Material		PE-HD		
Art. no.	DN	d, Ø [mm]	Rp ["]	H [cm]
360.719.16.1	40	40	1/2	5.5
360.720.16.1	40	40	3/4	5.5
360.721.16.1	40	40	1	5.5
361.719.16.1	50	50	1/2	6
361.720.16.1	50	50	3/4	6
361.721.16.1	50	50	1	6
361.722.16.1	50	50	1 1/4	6
361.723.16.1	50	50	1 1/2	6
363.724.16.1	56	56	2	6.5
364.724.16.1	60	63	2	7
365.725.16.1	70	75	2 1/2	7

Geberit HDPE straight adapter with male thread and plain end



Application purposes

- For building drainage

Characteristics

- Compression ring made of PP
- With seal made of EPDM

Technical data


Material		Brass		
----------	--	-------	--	--

Scope of delivery

- 1 protective cap
- Compression joint made of PP

Art. no.	DN	d, Ø [mm]	R ["]	H [cm]	h [cm]
359.309.00.1	50	50	1 1/2	6.5	2.7
359.311.00.1	56	56	2	6.5	2.7

Geberit HDPE straight adapter with female thread and plain end



Application purposes

- For building drainage

Characteristics

- Compression ring made of PP
- With seal made of EPDM

Technical data


Material	Brass
----------	-------

Scope of delivery

- 1 protective cap
- Compression joint made of PP

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	h [cm]
359.313.00.1	56	56	2	6	1.8

Geberit HDPE straight adapter with compression joint, for glueing



Application purposes

- For building drainage

Technical data

Material	PVC
----------	-----


Scope of delivery

- Compression joint made of PP

Art. no.	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]
359.421.00.1	56	50	8	4
359.423.00.1	56	63	7.8	4

1.3.5 Flange connections

Geberit HDPE blind flange



Application purposes

- For building drainage

Characteristics

- Plastic coated

Technical data


Material	Steel
----------	-------

Art. no.	DN	d, ø [mm]	D [cm]	k [cm]	m [cm]	H [cm]	n [Pc.]	PN [bar]
361.748.00.1	50	50	15	11	1.8	1.2	4	10
363.748.00.1	56 / 60	56 / 63	16.5	12.5	1.8	1.2	4	10
365.748.00.1	70	75	18.5	14.5	1.8	1.2	4	10
366.748.00.1	90	90	20	16	1.8	1.4	8	10
367.748.00.1	100	110	22	18	1.8	1.4	8	10
368.748.00.1	125	125	25	21	1.8	1.4	8	10
369.748.00.1	150	160	28.5	24	2.3	1.4	8	10
370.748.00.1	200	200	34	29.5	2.3	1.4	8	3.2
371.748.00.1	250	250	39.5	35	2.3	1.6	12	3.2
372.748.00.1	300	315	44.5	40	2.3	2	12	3.2

To order additionally

- Flange gasket made of EPDM

Geberit HDPE loose flange



Application purposes

- For building drainage
- For combining with Geberit HDPE weld-neck collars

Characteristics

- Plastic coated

Technical data

Material	Steel
----------	-------

Art. no.	DN	d, ø [mm]	D [cm]	k [cm]	m [cm]	H [cm]	n [Pc.]	PN [bar]
361.745.00.1	50	50	15	11	1.8	1.2	4	10
363.745.00.1	56 / 60	56 / 63	16.5	12.5	1.8	1.2	4	10
365.745.00.1	70	75	18.5	14.5	1.8	1.2	4	10
366.745.00.1	90	90	20	16	1.8	1.4	8	10
367.745.00.1	100	110	22	18	1.8	1.4	8	10
368.745.00.1	125	125	25	21	1.8	1.4	8	10
369.745.00.1	150	160	28.5	24	2.3	1.4	8	10
370.745.00.1	200	200	34	29.5	2.3	1.4	8	3.2
371.745.00.1	250	250	39.5	35	2.3	1.6	12	3.2
372.745.00.1	300	315	44.5	40	2.3	2	12	3.2

To order additionally

- Flange gasket made of EPDM

Geberit HDPE bolt set



Application purposes

- For building drainage

Characteristics

- Zinc-plated

Technical data


Material	Steel
----------	-------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	Colour / Surface	d, Ø [mm]	M [mm]	L [cm]
361.743.26.1	galvanized	50 - 75	16	7
366.743.26.1	galvanized	90 - 125	16	8
369.743.26.1	galvanized	160 - 200	20	9
371.743.26.1	galvanized	250	20	10
372.743.26.1	galvanized	315	20	11

Geberit HDPE weld-neck collar

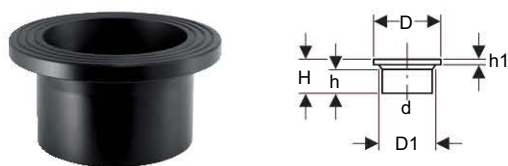

Application purposes

- For building drainage
- For combining with Geberit HDPE loose flanges


Technical data

Material	PE-HD
----------	-------

Art. no.	DN	d, Ø [mm]	D [cm]	D1 [cm]	H [cm]	h [cm]	h1 [cm]
361.744.16.1	50	50	8	5.4	6	4.2	0.8
363.744.16.1	56	56	9	6.8	6	3.6	0.8
364.744.16.1	60	63	9	6.8	6	3.7	0.8
365.744.16.1	70	75	11	7.8	6.5	4	0.9
366.744.16.1	90	90	12.8	9.6	7	4.4	1.1
367.744.16.1	100	110	14.8	11.6	7.5	4.8	1.2
368.744.16.1	125	125	16	13.1	8	5	1.4
369.744.16.1	150	160	19.8	16.5	9	5.1	1.7
370.744.16.1	200	200	26	20.6	7.8	5.4	1.4
371.744.16.1	250	250	32.5	25.6	7.8	5.2	1.6
372.744.16.1	300	315	37	31.5	10	7	2

1.3.6 Flange bushings

Geberit HDPE flange bushing

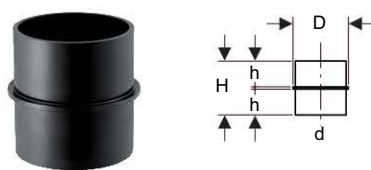

Application purposes

- For building drainage

Characteristics

- UV-resistant

Technical data


Material	PE-HD
----------	-------

Art. no.	DN	d, Ø [mm]	D [cm]	H [cm]	h [cm]
379.772.16.1	30	32	3.8	5.2	2.4
360.772.16.1	40	40	4.7	6.8	3.2
361.772.16.1	50	50	5.7	6.8	3.2
363.772.16.1	56	56	6.5	5.8	2.7
364.772.16.1	60	63	7	7.2	3.4
365.772.16.1	70	75	9	7.2	3.4
366.772.16.1	90	90	10.3	9.2	4.4
367.772.16.1	100	110	12	11.7	5.6

1.4 Waste fittings

1.4.1 Connection bends

Geberit HDPE connection bend 88.5°



Application purposes

- For building drainage
- For sanitary appliances with vertical outlet

Characteristics

- UV-resistant

Technical data

Material	PE-HD
----------	-------

Scope of delivery



- 1 protective cap

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	K [cm]
367.880.16.1	100	110	120	13.2	12	30	6	22

To order additionally

- Sleeve

Geberit HDPE connection bend 88.5° with lateral supplementary connections



Application purposes

- For building drainage
- For sanitary appliances with vertical outlet

Characteristics


- Lateral connections raised and closed
- UV-resistant

Technical data

Material	PE-HD
----------	-------

Art. no.	d, ø [mm]	d1, ø [mm]	A [cm]	di, ø [mm]	D [cm]	H [cm]	L [cm]	L1 [cm]	X1 [cm]	X2 [cm]
367.888.16.1	110	50	2	110	11.6	17	17.5	14	30	6

Geberit HDPE connection bend 90° for sleeve



Application purposes

- For building drainage


Characteristics

- Long leg
- UV-resistant

Technical data

Material		PE-HD					
Art. no.	DN	d, ø [mm]	d1, ø [mm]	di, ø [mm]	X1 [cm]	X2 [cm]	
361.080.16.1	50	50	50	44	7.5	10	
363.080.16.1	56	56	56	50	7.5	10	
363.083.16.1	56	56	50	44	7.5	10	
364.084.16.1	56	56	63	57	7.5	20	

Geberit HDPE connection bend 90° for wall-hung WC, with extension



Application purposes

- For building drainage
- For connecting sanitary appliances with horizontal outlet
- For Geberit Kombifix elements for wall-hung WC
- For vertical installation

Characteristics

- With seal made of EPDM
- UV-resistant

Technical data


Material		PE-HD					
----------	--	-------	--	--	--	--	--

Scope of delivery

- 1 protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	a [cm]	H [cm]	K [cm]
366.925.16.1	90 / 90	90	90	7.5	4.5	22.5	13
367.792.16.1	100 / 100	110	110	7.5	4.5	22.5	13
367.925.16.1	100 / 90	110	90	7.5	4.5	22.5	13

Geberit HDPE double connection bend 90°



Application purposes

- For building drainage
- For vertical installation
- For connecting sanitary appliances with horizontal outlet
- For Geberit Duofix and Geberit Kombifix elements for wall-hung WC
- For Geberit Sanbloc building blocks for wall-hung WC

Characteristics

- With seal made of EPDM
- UV-resistant

Technical data


Material		PE-HD					
----------	--	-------	--	--	--	--	--

Scope of delivery

- 2 protective caps

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	a [cm]	H [cm]	K [cm]
367.903.16.1	100 / 100 / 100	110	110	28.5	11	20.5	5
367.923.16.1	100 / 90 / 90	110	90	27.5	10.5	32.5	19

Geberit HDPE double connection bend 90° for sleeve



Application purposes

- For building drainage
- For washbasins, urinals and bidets
- For sleeves

Characteristics


- UV-resistant

Technical data

Material		PE-HD					
----------	--	-------	--	--	--	--	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	di, ø [mm]	H [cm]	K [cm]
363.472.16.1	56 / 50	56	50	15.5	44	12	3
365.472.16.1	70 / 56	75	56	15.5	50	13.5	9

Geberit HDPE double connection bend 90°, offset

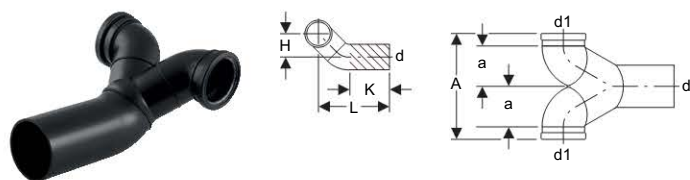

Application purposes

- For building drainage
- For horizontal installation
- For connecting sanitary appliances with horizontal outlet

Characteristics

- With seal made of EPDM
- UV-resistant

Technical data

Material	PE-HD
----------	-------

Scope of delivery

- 2 protective caps

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	a [cm]	H [cm]	L [cm]	K [cm]
367.485.16.1	100 / 90 / 90	110	90	27.5	10.5	10	34	12

1.4.2 Coupling sockets

Geberit HDPE connection ring seal socket



Application purposes

- For building drainage
- For connecting sanitary appliances

Characteristics

- With seal made of EPDM
- UV-resistant

Technical data

Material	PE-HD
----------	-------

Scope of delivery

- 1 protective cap

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]
379.768.16.1	30	32	32	4.6	2.5	0.5

Geberit HDPE connection ring seal socket with lip seal



Application purposes

- For building drainage
- For connecting sanitary appliances with horizontal outlet
- For Geberit Kombifix elements for wall-hung WC

Characteristics

- With seal made of EPDM
- UV-resistant

Technical data

Material	PE-HD
----------	-------


Scope of delivery

- 1 protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	L [cm]
366.941.16.1	90 / 90	90	90	11.1	4
367.941.16.1	100 / 90	110	90	11.1	4

1.4.3 Straight connectors

Geberit HDPE straight connector

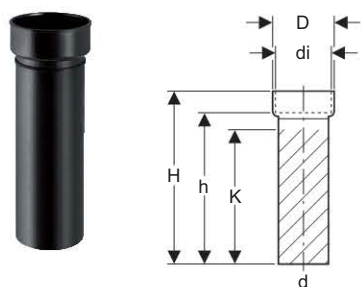

Application purposes

- For building drainage
- For sanitary appliances with vertical outlet
- For sleeves

Characteristics

- UV-resistant

Technical data

Material		PE-HD					
Art. no.	DN	d, Ø [mm]	di, Ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]
367.885.16.1	100	110	120	13.2	38	33	26

To order additionally

- Sleeve

Geberit HDPE straight connector with ring seal socket



Application purposes

- For building drainage
- For connecting sanitary appliances with horizontal outlet
- For Geberit Duofix and Geberit Kombifix elements for wall-hung WC
- For Geberit Sanbloc building blocks for wall-hung WC

Characteristics

- With seal made of EPDM
- UV-resistant

Technical data


Material		PE-HD					
Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	D [cm]	L [cm]	I [cm]	K [cm]
366.887.16.1	90 / 90	90	90	11.2	31	27.5	24
367.887.16.1	100 / 90	110	90	11.2	34.5	31.5	28

Scope of delivery

- 1 protective cap

1.4.4 P-traps

Geberit HDPE P-trap

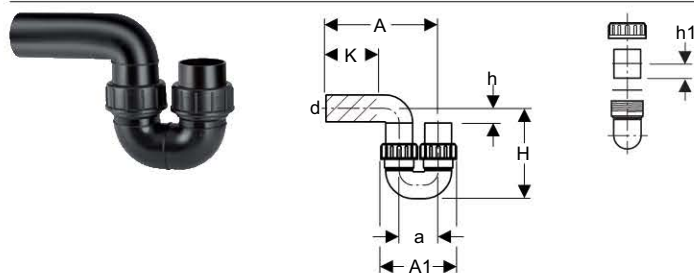

Application purposes

- For building drainage

Characteristics

- Outlet, horizontal
- Inlet vertical
- Lengthways non-positive

- Union nut made of PP
- With seal made of EPDM
- UV-resistant


Technical data

Depth of water seal	≥ 70 mm
Material	PE-HD

Art. no.	DN	d, ø [mm]	Discharge rate	A [cm]	A1 [cm]	a [cm]	H [cm]	h [cm]	h1 [cm]	K [cm]
364.730.16.1	60	63		30.5	18.5	9.5	20.5	5	3.4	16
365.730.16.1	70	75	5.4	34.5	25	13.5	29.5	7	3.4	14
366.730.16.1	90	90		41	27	14	27	5	5.6	20
367.730.16.1	100	110	5.9	46	31	16	31.5	6	5.6	22

1.4.5 Suction traps

Geberit HDPE suction trap with service opening



Application purposes

- For building drainage

Characteristics

- With expansion socket
- With cleaning opening 50 mm
- Cap made of PP
- With seal made of EPDM
- UV-resistant

Technical data

Depth of water seal	70 mm
Material	PE-HD

Scope of delivery


- 1 protective cap

Art. no.	DN	d, ø [mm]	Discharge rate	A [cm]	D [cm]	H [cm]	h [cm]	E [cm]
365.813.16.1	70	75	3.8	19.8	9.8	66.7	16.6	8 - 10.5
367.813.16.1	100	110	9.6	28.8	13.6	80.8	21.7	8 - 10.5

1.5 Accessories

1.5.1 Air admittance valves

Geberit air admittance valve GRB50 for Geberit drainage systems

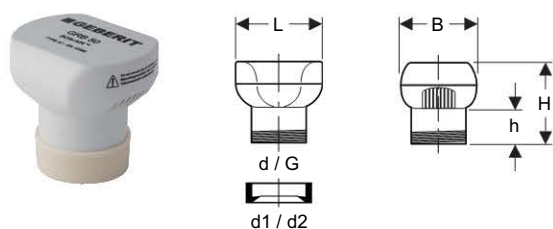

Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For discharge pipes with pipe dimensions $\varnothing$ 32 mm, $\varnothing$ 40 mm and $\varnothing$ 50 mm

Characteristics

- Anti-vacuum valve in accordance with EN 12380, Type A I

Technical data


Operating temperature	-20 - +60 °C
-----------------------	--------------

Scope of delivery

- Thermal insulation cap
- Sleeve
- Adapter

Art. no.	DN	d, $\varnothing$ [mm]	G ["]	d1, $\varnothing$ [mm]	d2, $\varnothing$ [mm]	B [cm]	H [cm]	h [cm]	L [cm]
303.900.00.1	50	50	1 1/2	32	40	7	7.3	3.5	8

Geberit air admittance valve GRB50 for Geberit drainage systems

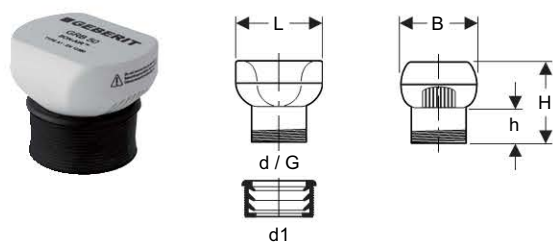

Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For discharge pipes with pipe dimensions $\varnothing$ 50 mm, $\varnothing$ 56 mm and $\varnothing$ 63 mm

Characteristics

- Anti-vacuum valve in accordance with EN 12380, Type A I

Technical data


Operating temperature	-20 - +60 °C
-----------------------	--------------

Scope of delivery

- Thermal insulation cap
- Sleeve

Art. no.	d, $\varnothing$ [mm]	G ["]	d1, $\varnothing$ [mm]	B [cm]	H [cm]	h [cm]	L [cm]
305.900.00.1	50	1 1/2	57	7	7.3	3.5	8

Geberit air admittance valve GRB90 for Geberit HDPE

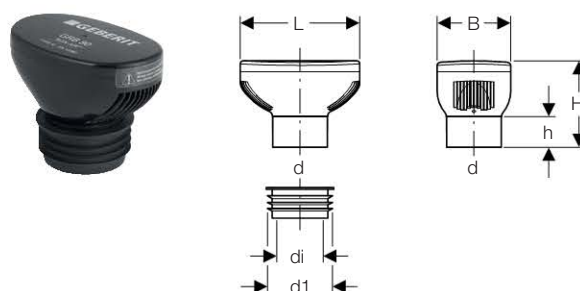

Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For discharge pipes with pipe dimensions $\varnothing$ 75 mm, $\varnothing$ 90 mm and $\varnothing$ 110 mm

Characteristics

- Thermal insulation integrated in housing
- Anti-vacuum valve in accordance with EN 12380, Type A I

Technical data

Operating temperature	-20 - +60 °C
-----------------------	--------------


Scope of delivery

- Sleeve

Art. no.	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	di, $\varnothing$ [mm]	B [cm]	H [cm]	h [cm]	L [cm]
310.006.00.1	90	103.5	75	12	14.1	5	19.5

1.5.2 Pipe brackets

Geberit pipe bracket with threaded socket G 1/2, adjustable

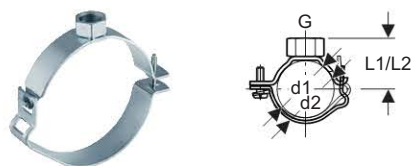

Application purposes

- For building drainage
- For fastening to threaded pipes
- For fastening pipes to ceilings and walls
- For anchor-point fastening of pipes in combination with electrofusion tapes
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets

Characteristics

- Adjustable
- Operable with one hand
- Female thread
- Zinc-plated


Technical data

Material		Steel				
Art. no.	DN	G ["]	d1, ø [mm]	d2, ø [mm]	L1 [cm]	L2 [cm]
360.841.00.2	40	1/2	40	48	3.5	3.9
361.841.00.2	50	1/2	50	58	4	4.4
363.841.00.2	56	1/2	56	64	4.3	4.7
364.841.00.2	60	1/2	63	71	4.7	5.1
365.841.00.2	70	1/2	75	83	5.3	5.7
366.841.00.2	90	1/2	90	98	6	6.4
367.841.00.2	100	1/2	110	118	7	7.4
368.841.00.2	125	1/2	125	133	7.8	8.2
369.841.00.2	150	1/2	160	168	9.5	9.9

Accessories

- Geberit plastic insert strip for pipe bracket → p. 42

Geberit pipe bracket with threaded socket M10, adjustable

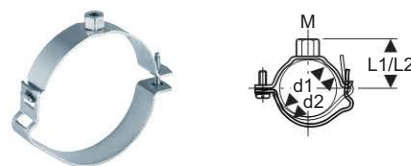

Application purposes

- For fastening with threaded rods
- For fastening pipes to ceilings and walls
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets

Characteristics


- Adjustable
- Operable with one hand
- Female thread
- Zinc-plated

Technical data

Material		Steel				
Art. no.	DN	d1, ø [mm]	d2, ø [mm]	M [mm]	L1 [cm]	L2 [cm]
360.843.00.2	40	40	48	10	3.5	3.9
361.843.00.2	50	50	58	10	4	4.4
363.843.00.2	56	56	64	10	4.3	4.7
364.843.00.2	60	63	71	10	4.7	5.1
365.843.00.2	70	75	83	10	5.3	5.7
366.843.00.2	90	90	98	10	6	6.4
367.843.00.2	100	110	118	10	7	7.4
368.843.00.2	125	125	133	10	7.8	8.2
369.843.00.2	150	160	168	10	9.5	9.9

Accessories

- Geberit plastic insert strip for pipe bracket → p. 42

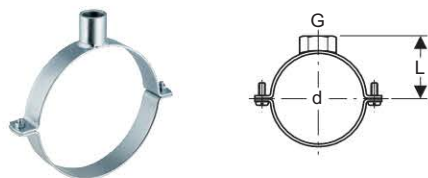Geberit pipe bracket with threaded socket G 1**Application purposes**

- For fastening to threaded pipes
- For fastening pipes to ceilings and walls
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets
- For anchor-point fastening of pipes in combination with double-flange bushings

Characteristics

- Female thread
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]
370.840.00.1	200	200	1	14.8
371.840.00.1	250	250	1	17.3
372.840.00.1	300	315	1	20.5

Accessories

- Geberit plastic insert strip for pipe bracket → p. 42

Geberit pipe bracket with threaded socket M8 / M10**Application purposes**

- For fastening with threaded rods
- For building drainage
- For fastening pipes to ceilings and walls
- For anchor-point fastening of pipes in combination with electrofusion tapes
- For sliding bracket fastening of pipes

Characteristics

- Threaded fastening M8 or M10
- Female thread
- Operable with one hand
- Zinc-plated

Technical data

Material	Steel
----------	-------


Art. no.	d, ø [mm]	M [mm]	L [cm]
360.832.00.2	40	8 / 10	4.3
361.832.00.2	50	8 / 10	4.8
363.832.00.2	56	8 / 10	5.1
364.832.00.2	63	8 / 10	5.5
365.832.00.2	75	8 / 10	6.1
366.832.00.2	90	8 / 10	6.8
367.832.00.2	110	8 / 10	7.8
368.832.00.2	125	8 / 10	8.6
369.832.00.2	160	8 / 10	10.3

Accessories

- Geberit plastic insert strip for pipe bracket → p. 42

1.5.3 Fastenings for pipe brackets

Geberit HDPE double-flange bushing




Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

Technical data

Material		PE-HD					
Art. no.	DN	d, ø [mm]	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]
370.751.16.1	200	200	21.3	19.1	4.1	6	1.5
371.751.16.1	250	250	26.2	20.1	4.1	6	2
372.751.16.1	300	315	32.6	20.1	4.1	6	2

Geberit plastic insert strip for pipe bracket





Application purposes

- For building drainage
- For sliding bracket fastening of pipes in connection with pipe brackets

Technical data

Material		PE-LD					
Art. no.	DN	d, ø [mm]	B [cm]	b [cm]	H [cm]	h [cm]	L [m]
362.846.00.1	40-150	40-160	3.8	3.1	0.4	0.2	10
370.846.00.1	200-300	200-315	4.8	4.1	0.4	0.2	10

Geberit electrofusion tape for anchor point



Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets



Characteristics

- One-piece
- Can be welded with Geberit electrofusion machines

Technical data

Material		PE-HD				
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	h [cm]
361.776.16.1	50	50	58	6.6	6	3
363.776.16.1	56	56	64	7.2	6	3
364.776.16.1	60	63	71	7.9	6	3
365.776.16.1	70	75	83	9.1	6	3
366.776.16.1	90	90	98	10.6	6	3
367.776.16.1	100	110	118	12.6	6	3
368.776.16.1	125	125	133	14.1	6	3
369.776.16.1	150	160	168	17.6	6	3
370.776.16.1	200	200	208	21.6	6	3
371.776.16.1	250	250	258	26.6	6	3

Geberit electrofusion tape for anchor point



Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

Characteristics

- Two-piece
- Can be welded with Geberit electrofusion machines


Technical data

Material		PE-HD				
----------	--	-------	--	--	--	--

Scope of delivery

- Set of 2 pieces

Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	h [cm]
372.776.16.1	300	315	323	33.1	6	3

Geberit base plate, square, two-hole, with threaded socket M10 / G 1/2**Application purposes**


- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material		Steel						
Art. no.	G	M	a	B	H	h	L	
	["]	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	
362.851.26.1	1/2	10	8.5	4	1.5	0.5	12	

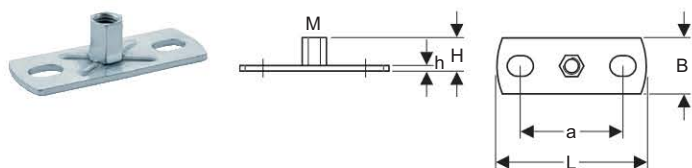Geberit base plate, square, two-hole, with threaded socket M8 / M10**Application purposes**


- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics

- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material		Steel					
Art. no.	M	a	B	H	h	L	
	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	
362.848.26.1	8 / 10	5.4	3	1.9	0.3	8	

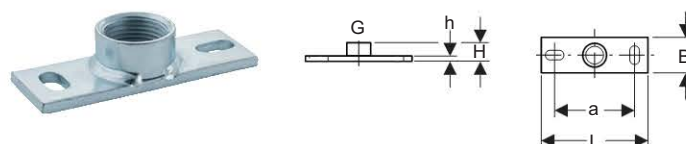Geberit base plate, square, two-hole, with threaded socket G**Application purposes**


- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

Characteristics

- Female thread
- Zinc-plated
- Two fastening points

Technical data

Material		Steel					
Art. no.	G	a	B	H	h	L	
	["]	[cm]	[cm]	[cm]	[cm]	[cm]	
362.826.26.1	1/2	9	4	2.1	0.6	12	
362.828.26.1	1	9	4	2.6	0.6	12	

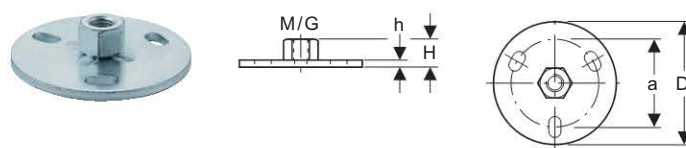Geberit base plate, round, three-hole, with threaded socket M10**Application purposes**

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure


Characteristics

- Female thread
- Zinc-plated
- Three fastening points

Technical data

Material		Steel				
Art. no.	M	a	D	H	h	
	[mm]	[cm]	[cm]	[cm]	[cm]	
362.837.26.1	10	5	7	1.6	0.4	

Geberit base plate, round, three-hole, with threaded socket G 1/2

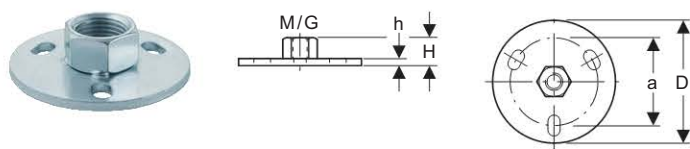

Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings
- For fastening pipes to ceilings and walls

Characteristics

- Female thread
- Zinc-plated
- Three fastening points

Technical data

Material	Steel
----------	-------

Art. no.	G ["]	a [cm]	D [cm]	H [cm]	h [cm]
362.839.26.1	1/2	5	7	1.9	0.4

Geberit threaded rod



Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

Characteristics

- Zinc-plated

Technical data


Material	Steel
----------	-------

Scope of delivery

- Protective shell

Art. no.	M [mm]	L [cm]
362.836.00.1	10	50

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For anchor point and sliding bracket fastenings

Characteristics

- Female thread continuously threaded
- Zinc-plated

Technical data

Material	Steel
----------	-------

Art. no.	G ["]	D [cm]	L [m]
362.857.26.1	1/2	2.5	1

Geberit hanger bolt




Application purposes

- For fastening Geberit pipe brackets with coupling M10 to wood constructions
- For building drainage

Art. no.	L [cm]
362.833.00.1	10

Geberit double nipple



Application purposes

- For building drainage

Characteristics

- Reduced
- Zinc-plated


Technical data

Material	Steel
----------	-------

Art. no.	Colour / Surface	G ["]	M [mm]	H [cm]	SW [mm]
362.856.26.1	galvanized	1/2	10	2.8	22

1.5.4 Support shells

Geberit support shell, zinc-plated and coated



Application purposes

- For sanitary, heating and industrial installations
- For fastening pipes
- For stabilising Geberit fastening systems

Characteristics

- Coated
- Steel, black coated exterior
- Zinc-plated

Technical data

Material		Steel			
Art. no.	DN	di, Ø [mm]	s [mm]	L [m]	
360.850.00.1	40	40	0.75	3	
361.850.00.1	50	50	0.75	3	
363.850.00.1	56	56	0.75	3	
364.850.00.1	60	63	0.75	3	
365.850.00.1	70	75	0.75	3	
366.850.00.1	90	90	0.75	3	
367.850.00.1	100	110	0.75	3	
368.850.00.1	125	125	0.75	3	

1.5.5 Sealings

Geberit HDPE weld-on cap



Application purposes

- For building drainage
- For butt welding

Characteristics

- UV-resistant

Technical data

Material		PE-HD	
Art. no.	DN	d, Ø [mm]	
379.812.16.1	30	32	
360.812.16.1	40	40	
361.812.16.1	50	50	
363.812.16.1	56	56	
364.812.16.1	60	63	
365.812.16.1	70	75	
366.812.16.1	90	90	
367.812.16.1	100	110	
368.812.16.1	125	125	
369.812.16.1	150	160	
370.812.16.1	200	200	

Geberit HDPE protective cap for pipe end



Application purposes

- For building drainage
- For protecting pipe ends

Technical data

Material		PE-LD			
Art. no.	Colour / Surface	DN	d, Ø [mm]	D [cm]	H [cm]
360.802.92.1	yellow	40	40	4.2	3.5
361.802.92.1	yellow	50	50	5.2	3.5
363.802.92.1	yellow	56	56	5.8	3.5
364.802.92.1	yellow	60	63	6.5	3.5
365.802.92.1	yellow	70	75	7.8	3.5
366.802.92.1	yellow	90	90	9.3	3.5
367.802.92.1	yellow	100	110	11.3	4
368.802.92.1	yellow	125	125	12.9	4
369.802.92.1	yellow	150	160	16.4	3

Geberit HDPE screw cap



Application purposes

- For building drainage

Characteristics

- With seal made of EPDM

Technical data

Material		PP			
Art. no.	d, Ø [mm]	Rg ["]	D [cm]	H [cm]	
379.781.16.1	32	44 x 1/8	5.6	2.6	
360.781.16.1	40	52 x 1/6	6.4	3.3	
361.781.16.1	50	62 x 1/6	7.4	3.3	
363.781.16.1	56	70 x 1/6	8.5	3.5	
364.781.16.1	63	75 x 1/6	9	4.2	
365.781.16.1	75	95 x 1/6	11.2	4.5	
366.781.16.1	90	110 x 1/4	12.9	5	
367.781.16.1	110	130 x 1/4	14.9	6.5	

Geberit repair patch



Application purposes

- For repairing holes in pipes and fittings Ø 40–160 mm in Geberit HDPE and Geberit Silent-db20 systems
- For building drainage
- For repairing holes in concealed cisterns made of PE-HD
- For Geberit repair tool

Art. no.	d, Ø [mm]
853.650.16.1	40 - 160

1.5.6 Seals

Geberit HDPE flange gasket



Application purposes

- For building drainage
- For creating flange connections

Characteristics


- With seal made of EPDM

Technical data

Material		EPDM				
Art. no.	DN	d, Ø [mm]	di, Ø [mm]	D [cm]	H [cm]	
361.742.00.1	50	50	45	9.2	0.3	
363.742.00.1	56 - 60	56 - 63	59	10.7	0.3	
365.742.00.1	70	75	69	12.7	0.3	
366.742.00.1	90	90	83	14.2	0.3	
367.742.00.1	100	110	102	16.2	0.3	
368.742.00.1	125	125	116	19.2	0.3	
369.742.00.1	150	160	149	21.7	0.3	
370.742.00.1	200	200	191	27.2	0.3	
371.742.00.1	250	250	238	32.7	0.4	
372.742.00.1	300	315	298	37.7	0.4	

1.5.7 Protection covers

Geberit protective cap



Application purposes


- For building drainage
- For Geberit coupling sockets

Technical data

Material	PE-LD
----------	-------

Art. no.	Colour / Surface	DN	d, ø [mm]	H [cm]	h [cm]
366.820.92.1	yellow	90	90	8.3	3.3

Geberit protective cap



Application purposes

- For building drainage
- For Geberit coupling sockets
- For coupling sockets for floor-standing WCs

Technical data

Material	PE-LD
----------	-------

Art. no.	Colour / Surface	DN	d, ø [mm]	H [cm]	h [cm]
367.819.92.1	yellow	100	110	7.5	2.5

1.5.8 Consumables

Geberit lubricant, 250 ml



Application purposes

- For lubricating the seals of push-fit connections
- For building drainage

Art. no.

953.761.00.1

Geberit grease pencil



Application purposes

- For building drainage

Characteristics

- Wax paint marker with paper jacket

Art. no.

958.782.00.1